

Peking

A luminaire encased in a stylish, one-piece, cloud puff linear design



ELECTRICAL

- Electronic ballasts : 120V, 120-277V, 347V
- All electrical components are UL approved/recognized
- Lamp holders which are provided ensure positive lamp retention
- Standard ballast are electronic instant start for T8 lamp configurations, other options available
- The standard voltage is 120V, 60HZ, or as specified. Units are also available which are suitable for multi-voltages and for 50-60 Hz
- All luminaires are pre-wired for connection of individual units.

OPTIONS


- Dimming ballast (D)
- Emergency ballast (EM)

HOUSING

- Die formed heavy gauge cold rolled steel, finished in white polyester polymer with high reflectivity. Ample knockouts on housing back side for mounting and electrical feeds

OPTICS

- A one piece cloud/puff like style, pressure formed with a blend of matte acrylic and impact acrylic material. The smooth matte diffuser offers uniform light distribution with high visual comfort while concealing the lamps. Removal of diffuser is done by 2 screws at either end of luminaire.

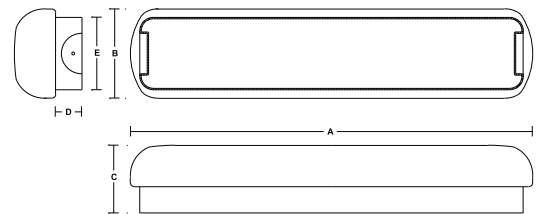

Size	A	B	C	D	E
2'	26.75"	6.00"	4.125"	1.50"	4.625"
3'	38.75"	6.00"	4.125"	1.50"	4.625"
4'	50.75"	6.00"	4.125"	1.50"	4.625"

FEATURES

- Utilizes a low profile diffuser, cloud/puff like design, in a compact linear shape
- Offered with choice of 1 or 2 T8 lamp configurations
- Available in various lengths 2', 3' and 4'
- Unique diffuser design renders a floating like appearance.
- Horizontal or vertical mount.
- Easy access to lamps and ballast
- UL/cUL approved

APPLICATIONS:

- Hallways
- Corridors
- Vanities
- Dressing rooms
- Stairwells
- Utility area

ORDERING INFORMATION

SERIES	# LAMPS	WATTAGE	LENGTH	VOLTAGE	OPTIONS
PEK	1	17	24	120	
	2	25	36	UNV (120-277)	
		32	48	347	

Dimensions subject to change without notice. Certain configurations may not be available.



DATE	PROJECT NAME	MODEL	TYPE