ARCHITECTURAL SUSPENDED SERIES



Chic versatility featuring myriad lighting options



FEATURES

- Versatile fixture offering a combination of direct/indirect illumination
- Available with 2 or 3 lamps
- Low profile design around the T5/T5H0 light source, 2 9/16" overall height
- A thin polycarbonate lens is used to diffuse direct light
- Tool free lamp replacement & ballast access
- Units are shipped complete with 4' canopy kits including aircraft cables and clear metal braid electrical cord (50"), other lengths available- consult factory
- Custom color available on request

 consult factory

HOUSING

 Electrostatic powder painted white 18ga sheet steel. Custom colors available on requestconsult factory

OPTICS

 A thin white polycarbonate overlay is used to diffuse direct illumination

ELECTRICAL

- Electronic ballasts: 120V, 120-277V, 347V
- All electrical components are UL approved/recognized
- Lamp holders which are provided ensure positive lamp retention
- Standard ballast are programmed rapid start for T5/T5HO lamp configurations, consult factory for other options
- The standard voltage is 120V, 60HZ, or as specified. Units are also available which are suitable for multi-voltages and for 50-60 Hz

OPTIONS

- Dimming Ballast (D)
- Emergency Ballast (EM)



APPLICATIONS

Conferences rooms

Retail applications

Board rooms

Corridors

Librairies


Classrooms

Offices










Maximum Candela = 2014.5 Located At Horizontal Angle = 0, Vertical Angle = 175 #1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.) #2 - Horizontal Cone Through Vertical Angle (175) (Through Max. Cd.)

117/32"

3 X F54T5H0

ZONAL LUMEN SUMMARY							
Zone	Lumens	% Lamp	% Fixt				
0-30	567.36	4.2	7				
0-40	915.67	6.9	11.3				
0-60 1	602.21	12 1	9.7				
0-90	2178.61	16.3	26.8				
90-121	287.23	9.6	15.9				
90-130	2225.53	16.7	27.4				
90-150	4342.93	32.5	53.5				
90-180	5939.64	44.5	73.2				
0-180	8118.25	60.8	100				
Total Luminaire Efficiency = 60.8%							

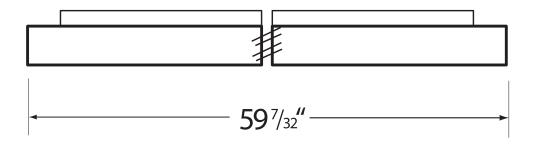

ORDERING INFORMATION



SERIES	TOTAL # LAMPS	WATTAGE	COLOR	VOLTAGE	OPTIONS
KBP	2	28 = 28WT5	W = White	120	
	3	54 = 54WT5H0	C = Custom	UNV (120-277) 347	

Note: Dimensions subject to change without notice. Certain configurations may not be available.

DATE	PROJECT NAME	MODEL	TYPE